

FORM PTO-1390 (REV. 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER PSS 2 0067	
<b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>					
INTERNATIONAL APPLICATION NO. PCT/US00/10778		INTERNATIONAL FILING DATE 21 April 2000		U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <b>10/018267</b>	
TITLE OF INVENTION <b>APPARATUS AND METHOD FOR INSPECTING MULTI LAYER PLASTIC CONTAINERS</b>					
APPLICANT(S) FOR DO/EO/US <b>COCHRAN, Don, W. et al.</b>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</li> <li>4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input type="checkbox"/> has been communicated by the International Bureau.</li> <li>c. <input checked="" type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is attached hereto.</li> <li>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</li> </ol> </li> <li>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input type="checkbox"/> have been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input checked="" type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</li> <li>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>					
<b>Items 11 to 20 below concern document(s) or information included:</b>					
<ol style="list-style-type: none"> <li>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>13. <input type="checkbox"/> A FIRST preliminary amendment.</li> <li>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</li> <li>15. <input type="checkbox"/> A substitute specification.</li> <li>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</li> <li>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</li> <li>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</li> <li>20. <input type="checkbox"/> Other items or information:</li> </ol>					

OCT 23 2001

"Express Mail" Mailing Label Number 819521683614US  
 Date of Deposit OCT 23, 2001  
 I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail-Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, DC 20231.

Roseanne G. Sullivan  
 (TYPED OR PRINTED NAME OF SENDER)  
Roseanne G. Sullivan  
 (SIGNATURE)

JCS Rec'd PCT/PTO 21 OCT 2007

U.S. APPLICATION NO. <b>10/018267</b>		INTERNATIONAL APPLICATION NO. <b>PCT/US00/10778</b>		ATTORNEY'S DOCKET NUMBER <b>PSS 2 0067</b>	
<b>21</b> <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... <b>\$1000.00</b> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860.00</b> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710.00</b> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690.00</b> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b> <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>CALCULATIONS PTO USE ONLY</b>	
				\$ 100.00	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total claims	6 - 20 =		x \$18.00	\$	
Independent claims	2 - 3 =		x \$80.00	\$	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00	\$	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$	
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				+	\$ (50.00)
<b>SUBTOTAL =</b>				\$ 50.00	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
<b>TOTAL NATIONAL FEE =</b>				\$	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property +				\$ 40.00	
<b>TOTAL FEES ENCLOSED =</b>				\$ 90.00	
				Amount to be refunded:	\$
				charged:	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>50.00</u> to cover the above fees is enclosed. A check in the amount of \$ <u>40.00</u> is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>060308</u> . A duplicate copy of this sheet is enclosed.					
d. <input type="checkbox"/> Fees are to be charged to a credit card. <b>WARNING:</b> Information on this form may become public. <b>Credit card information should not be included on this form.</b> Provide credit card information and authorization on PTO-2038.					
<b>NOTE:</b> Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: Richard J. Minnich Fay, Sharpe, Fagan, Minnich & McKee, LLP 1100 Superior Avenue, 7th Floor Cleveland, Ohio 44114-2518					
				SIGNATURE <u>Richard J. Minnich</u> NAME <u>Richard J. Minnich</u>	
				24,175 REGISTRATION NUMBER	

The PTO did not receive the following listed item(s) receive only

\$150 Dollar fee 40 dollar  
not receive.

## APPARATUS AND METHOD FOR INSPECTING MULTI-LAYER PLASTIC CONTAINERS

### Background of the Invention

This invention relates to an apparatus and method for inspecting multi-layer plastic containers. More particularly, the invention relates to such an apparatus and method whereby optical energy absorbing compounds are added to the materials comprising the layer(s) of the container to facilitate inspection thereof.

While the invention is particularly directed to the art of inspection, and will be thus described with specific reference thereto, it will be appreciated that the invention may have usefulness in other fields and applications.

The application of standard machine vision techniques to inspect the structural integrity of formed plastic food and beverage containers is well established practice. These innovations have proven to be very useful quality and process control tools which allow the manufacturers of these products to improve both the productivity and quality resultant from their manufacturing processes.

A recent trend in the area of plastic container manufacturing is the migration to multi-layer container construction. As part of this trend, plastic container manufacturers have evolved their process to the point wherein the container structures which they manufacture are comprised of multiple layers of unique polymer compounds, each specially formulated to perform a different container-related function. For example, in new multi-layer containers, one layer of the product might be specially designed to prevent the transport of oxygen through the container walls while another layer might provide the container with structural integrity. While the different layers may have unique chemical formulations and provide unique performance attributes to the container, the various components of a multi-layer plastic container will most likely have very similar optical properties, at least within the visible range of the electromagnetic spectrum. More specifically, the index of refraction and optical transmission of these different materials are generally quite similar. This optical similarity is not accidental. In order to maintain the look consumers have become accustomed to with regard to plastic food and beverage containers, the manufacturers have, during the formulation of suitable multi-layer components, been careful to

maintain constant the optical properties of the polymers. This fact is significant in relationship to the process of automated inspection of plastic containers. Many prior art machine vision systems utilize CCD cameras sensitive to radiation in the visible wavelength range and a suitable visible light source operated as a backlight. In this fashion, the structural integrity of the container is checked for manufacturing flaws. Because the various layers of a multi-layer plastic container all have very similar optical properties in the visible wavelength range, the selective inspection of the individual layers of a multi-layer container would be extremely hard to do using state-of-the-art machine vision solutions. While it would be possible to detect a defect extending through the container wall, the ability to detect the presence or absence of a layer type, in part or in whole, would be next to impossible. The similar optical properties of the corresponding layers and the lack of image contrast which directly results makes layer-specific inspection impossible using state-of-the-art technology.

The method and apparatus to be disclosed herein overcomes the limitations of state-of-the-art inspection systems describing a method and associated hardware which would allow robust inspection of multi-layer plastic containers. Further, the present invention is a unique method of employing machine vision techniques which incorporate cameras as the sensors and process the resultant image to determine, in a very robust way, the status of the various layer(s) in a plastic bottle.

#### Summary of the Invention

The invention relates to an apparatus and method whereby optical energy absorbing compounds are added to materials comprising the layers of the container to facilitate inspection thereof.

In one aspect of the invention, a machine vision apparatus comprises a sensor device comprising an array of photosensitive elements operative to be sensitive to radiation within the near IR portion of the electromagnetic spectrum, a source of electromagnetic radiation wherein a portion of an emitted spectrum thereof is within the near IR portion of the electromagnetic spectrum, part detection, tracking, and conveyance means operative to interact with multi-layer containers under test and maneuver the containers into an advantageous position between the sensor device and source and to provide instrument control signals to both the sensor device and source

wherein the containers have selectively absorptive dyes, a processing means which receives the output of the sensor device and executes processing operations to analyze attributes based on a presence of selectively absorptive dyes acting in the near IR portion of the electromagnetic spectrum, and a means which receives the processed output of the processing means and acts to facilitate one of rejecting and marking for subsequent action the container based on the attributes analyzed.

In another aspect of the invention, a method comprises steps of forming a container having a plurality of polymer layers -- each polymer layer being formulated to perform a different set of container-related functions, selectively adding optical absorbing compounds acting in the near IR wavelength range to the plurality of polymer layers, disposing the container between the sensing means and the source of near IR electromagnetic radiation, irradiating the source to generate near IR electromagnetic radiation, sensing the near IR electromagnetic radiation by the sensing means, and determining the attributes of the container based on the sensing.

Further scope of the applicability of the present invention will become apparent from the detailed description provided below. It should be understood, however, that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art.

#### Brief Description of the Drawings

FIGURE 1 is a schematic representation of a preferred embodiment of the present invention;

FIGURE 2 is a graph showing spectral transmission curves for two materials typically used in the construction of plastic containers;

FIGURE 3 is a graph showing spectral transmission curves for two materials that have been dyed with infrared material;

FIGURE 4 shows an implementation of the invention; and,

FIGURE 5 is a flowchart according to the present invention.

### Detailed Description of the Preferred Embodiments

The disclosed method and invention is directed to adding unique amounts and/or types of optical energy absorbing compounds to the formulated polymers comprising the layer(s) of material forming, for example, plastic containers at the time of their preparation. These absorbing materials preferably possess the attribute of selectively absorbing, in a well-controlled fashion, an amount of near infrared (near IR) light passing through its volume. The near IR wavelength range which is referenced here extends from approximately 700nm to 1000nm. The theorized absorbing materials or infrared dyes are preferably added to the various layer chemistries for the sole purpose of enabling a thorough inspection of the container which will eventually be formed from them. The infrared dyes which are preferably deployed would typically be highly transmissive in the 400nm to 700nm visible wavelength range. In this fashion, their presence within the various plastic layers is preferably unnoticed by human observers. However, a sensor or a CCD camera, which typically has a spectral response extending from the visible range out to about 1000nm in the near IR range, properly disposed and working in combination with a source of near IR illumination, could be used to inspect the various layers of a multi-layer plastic container.

The use of markers (e.g. the use of substances for the sole purpose of enabling the manual and/or automated inspection of and object) is not a novel concept. In this regard, the use of UV fluorescent dyes to aid in the automatic inspection of products is known. Also, the concept of formulating and applying IR dyes and inks to mark products is an established practice. The use of IR inks in bar coding applications is also known. These are generally in the category of "invisible inks" applied upon the surface of a product for the purpose of reading or tracking.

However, the application of IR dyes within the various layers of a plastic container to aid in the subsequent inspection of the formed container is a novel improvement to the existing state-of-the-art of machine vision technology. The prior art UV marker innovations referenced above have proven to be of limited value in high speed automated inspections due to a lack of adequate UV-induced signal strength. The amount of UV light energy which is available from all reasonably applied commercial sources is limited to start. The situation is made worse by the fact

that a lossy conversion factor (UV radiation input energy to visible light output energy) further reduces the light available for detection by a camera. In high speed applications where short camera exposure times are required to properly stop the action of the moving parts, the amount of UV-induced light is insufficient for proper inspection. This is because the UV as typically used currently is a down conversion method whereby the coating or ink or additive is such that when exposed to ultra-violet light it fluoresces with the production of light in the visible light spectrum (i.e. between 400nm and 700nm). This so-called "down conversion" is very inefficient and results in an inadequate amount of light being produced to facilitate high quality high speed inspection as explained above.

But, by using a UV light source which is deployed to project through the part being inspected, then a UV light blocking additive would serve to reveal areas that do not have the layer which contains such marker additive. This assumes, of course, that a sensor or camera is being used that is directly sensitive to the UV light frequency being used. It can be appreciated, however, by one skilled in the art that UV blocking markers could be used instead of or in addition to the IR blocking markers where desirable. For example, a UV blocking "marker" may already be present because it may have been added to preserve freshness of the food, etc. but it could, with this invention, serve double duty.

An IR marker approach is preferred over a similar UV marker approach because the available signal intensity achievable using commercially available IR sources of energy is orders of magnitude higher than what can be achieved in the UV wavelength range. In addition, the IR marker technique relies upon the direct detection of IR radiation. The CCD cameras are typically highly responsive to near IR energy and, thus, a lossy conversion efficiency to the visible range is avoided.

The addition of an IR dye to the polymer chemistry of a container layer is a fundamentally different process as compared to the process of printing an IR symbol to the surface of manufactured part. In the former, the dye becomes an integral part of the raw material, perhaps added by the polymer manufacturer, at the earliest stages of the manufacturing process or could be introduced by way of colorant or other process chemical additive. In this manner, the marker is available to be used to enhance inspection at the earliest stages, or in any stage, of the container

manufacturing process. This would mean that the inspection could be performed at the preform stage during mold qualification, or on-line as they are exiting the molding machine or after the bottles are blown. This is quite different from the application of a printed IR label which is typically applied at the end of the manufacturing process and serves no useful function with regard to product quality inspection, instead being limited to inventory control and tracking functions.

Figure 1 is a schematic representation of the preferred embodiment of the subject invention. A multi-layer plastic container 10 composed of plastic layers suitably dyed with IR absorbing dyes is allowed to pass through an inspection zone 20. Although different configurations of sensors or cameras could be implemented depending upon the inspection needs and application specification, in the preferred embodiment, two or more camera/lens assemblies 40 are positioned to acquire images of the container 10. One camera/lens assembly 40 would typically be positioned to acquire an image of the base of the container 15 while two or more camera/lens assemblies 40 would typically be deployed to acquire image(s) of the top/neck/sidewall portion of the container. Positioned opposite to each camera/lens assembly 40 will be an appropriate IR light source 30. The preferred embodiment of the IR light sources 30 will be an array of IR emitting solid-state light emitting diodes (LEDs). The camera/lens assemblies 40 and IR light sources 30 are connected to a Control/Processing/Display Module 50 which will be used to facilitate either manual or automatic inspection of the plastic container 10 for pre-defined defects.

Limiting the discussion temporarily to a two layer container for the sole purpose of further clarifying the subject invention, the spectral transmission curves described in Figures 2 and 3 are now referenced. Figure 2 depicts the spectral transmission curves for two plastics typically used in the construction of plastic containers. Curve 60 depicts a plastic which would be described as a clear plastic. The optical transmission of the plastic is very high (near 100%) throughout the important 400nm to 700nm visible wavelength range. A high, uniform optical transmission are the measurable attributes of an object defined as clear. Curve 70 shows the same plastic after a green dye has been added to the formula.

This curve depicts a material which has a reduced transmission at the lower wavelengths (blue region) of the visible spectrum. The optical transmission increases



to a peak near 100% at 550nm (green region) and then dramatically falls off within the longer wavelength regions of the visible spectrum (red range). Outside the visible range, the transmission of the plastic quickly rises to the level of the clear plastic curve 60 and remains that way throughout the rest of the 700nm to 1000nm near IR region. This behavior, selective absorption in the visible range/no effect in the IR range, is typical of dyes which act within the visible spectrum.

Figure 3 illustrates two spectral transmission curves of suitable IR dyed plastics as disclosed by this invention. Curve 80 represents the transmission of one type of plastic which would appear to clear to a human observer because of its high transmission in the 400nm to 700nm visible wavelength range. This plastic has, however, a well-defined spectral absorption starting at approximately 750nm. Curve 90 has a similar IR absorption which takes effect at approximately 850nm. With both of these plastics contained in adjacent layers within the container structure, the plastics would be visibly indistinguishable but capable of being robustly detected and inspected using the hardware implementation defined by this invention.

Anyone expert in the field of machine vision, i.e. one of ordinary skill in this art, would be able to define several inspection setups which would allow the two plastic types defined by Curves 80 and 90 to be thoroughly inspected while simultaneously present with the field of view of the camera/lens assemblies 40. The spirit of the disclosed invention covers all reasonable combinations of plastic materials and IR or UV absorbing or blocking dyes which can be conceived of and potentially deployed. Potentially, many different layers could be effectively detected and evaluated for quality with the right combination of markers added for absorption at different frequencies or different blocking percentages. In this regard, for example, the existence, thickness and/or integrity (e.g. presence or absence of pinholes) of the layer(s) could be analyzed. Moreover, the invention could also be applied to containers having only a single layer. In this case, the overall quality, thickness and/or integrity of the layer would likely be the primary focus of inspection. Further, the invention would also have usefulness in the inspection of other types of items beyond containers such as plastic sheet material of a single or multiple layer configuration.

It should be apparent upon a reading of the detailed description hereof, that the invention of the present application can be implemented in a machine vision apparatus

and/or system. Referring more specifically to Figure 4, a system 100 incorporating the invention of Figure 1 comprises a sensor device(s) 102 and a source(s) of electromagnetic radiation 104. The sensor device is preferably an array of photosensitive elements which, as an example, may take the form of a charge-coupled device (CCD) based camera(s). The source is preferably a source of electromagnetic radiation wherein a significant portion of the emitted spectrum thereof is within the near infrared (IR) portion of the electromagnetic spectrum. Preferably, the source is an array of light-emitting diodes (LEDs). Also shown in Figure 4 is a part detector 108, tracking system 110 and conveyance means 112 which are all operative to interact with the multilayer containers 10 under test and are used to both maneuver the containers into an advantageous position between the sensor and source, as well as to provide instrument control signals to both the sensor and the source. Of course, the multilayer containers under test preferably have selectively absorptive dyes which facilitate inspection under the invention. Also shown in Figure 4 is a processing means 114 which receives the output of the sensor device and executes processing operations which are specifically tuned to analysis attributes which result from the presence of the selectively absorptive dyes acting in the near infrared portion of the electromagnetic spectrum. Also included in the system 100 is a reject/mark device 116 which receives the process output of the processing means and acts to physically reject, or otherwise mark for subsequent action, the containers or objects determined to be out of or, alternatively, within the specification as previously standardized and encoded within the processing means. It should further be appreciated that the LED emitters of the preferred embodiment may be selectively pulsed to facilitate stopping the action of rapidly moving multilayer containers under test.

In operation, it is to be appreciated that the method of the present invention useful in this system of Figure 4 includes, with reference to Figure 5, prior to the formation process, selectively adding optical absorbing compounds to the polymer layers (step 502). Preferably, the optical absorbing compounds act in the near IR wavelength range. Next, a container having the plurality of polymer layers (e.g. two or more unique polymer layers) is formed whereby each polymer layer is specifically formulated to perform a different set of container related functions (step 504). For inspection purposes, the container is then disposed between a sensing means and a

source of near IR electromagnetic radiation (step 506). Preferably, this disposing comprises maneuvering the container into an advantageous position between the sensing means and the source means. The source is then activated or irradiated with near IR electromagnetic radiation (step 508). Next, the radiation is sensed by the sensor device(s), or means (step 510). The attributes of the container (e.g. structural integrity) are then determined based on the sensing (step 512). It should be appreciated that the method may further comprise rejecting or otherwise marking for subsequent action the container or object determined to be out of or alternatively, within specifications as previously standardized and encoded within the processing means of the system. This rejection or marking could be based on a determination of the state, quality or acceptability of the container (which may be based on the determination of attributes).

The above description merely provides a disclosure of particular embodiments of the invention and is not intended for the purpose of limiting the same thereto. As such, the invention is not limited to only the above described embodiments. Rather, it is recognized that one skilled in the art could conceive alternative embodiments that fall within the scope of the invention. The spirit of the disclosed invention should in no way be limited by the very narrow and simplified case outlined as the preferred embodiment.

Having just described the invention, we claim:

1. A method for inspecting attributes of containers useful in a system having at least one sensing means and a source of near IR electromagnetic radiation, the method comprising steps of:

selectively adding optical absorbing compounds acting in the near IR wavelength range to a plurality of polymer layers;

forming a container having the plurality of polymer layers, each polymer layer being formulated to perform a different set of container-related functions;

disposing the container between the sensing means and the source of near IR electromagnetic radiation;

activating the source to generate near IR electromagnetic radiation;

sensing the near IR electromagnetic radiation by the sensing means; and, determining the attributes of the container based on the sensing.

2. The method of claim 1 further comprising determining a state, quality, or acceptability of the container based on sensing and determining.

3. The method of claim 2 further comprising one of rejecting and marking for subsequent action the container based on the state, quality or acceptability of the container.

4. A machine vision apparatus comprising:

a sensor device comprising an array of photosensitive elements operative to be sensitive to radiation within the near IR portion of the electromagnetic spectrum;

a source of electromagnetic radiation wherein a portion of an emitted spectrum thereof is within the near IR portion of the electromagnetic spectrum;

part detection, tracking, and conveyance means operative to interact with multi-layer containers under test and maneuver the containers into an advantageous position between the sensor device and source and to provide instrument control signals to both the sensor device and source;

10           a processing means which receives output of the sensor device and  
executes processing operations to analyze attributes based on a presence of selectively  
absorptive dyes acting in the near IR portion of the electromagnetic spectrum; and,

15           a means which receives the processed output of the processing means  
and acts to facilitate one of rejecting and marking for subsequent action the container  
based on the attributes analyzed.

5.       The apparatus of claim 4 wherein the source comprises an array of LED  
emitters.

6.       The apparatus of claim 5 wherein the LED emitters are pulsed.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : G01N 21/00, 9/04, B07C 5/00		A1	(11) International Publication Number: <b>WO 00/65327</b>
			(43) International Publication Date: 2 November 2000 (02.11.00)
(21) International Application Number: PCT/US00/10778		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 21 April 2000 (21.04.00)			
(30) Priority Data: 60/130,894 23 April 1999 (23.04.99) US			
(71) Applicant (for all designated States except US): PRESSCO TECHNOLOGY INC. [US/US]; 29200 Aurora Road, Solon, OH 44139 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): COCHRAN, Don, W. [US/US]; 7521 Chelsea Lane, Gates Mills, OH 44040 (US). CECH, Steven, D. [US/US]; 670 Rock Creek Drive, Aurora, OH 44202 (US).		Published With international search report.	
(74) Agent: MINNICH, Richard, J.; Fay, Sharpe, Fagan, Minnich & McKee, LLP, 7th floor, 1100 Superior Avenue, Cleveland, OH 44114-2518 (US).			

(54) Title: APPARATUS AND METHOD FOR INSPECTING MULTI-LAYER PLASTIC CONTAINERS

(57) Abstract

This invention relates to an apparatus and method for inspecting multi-layer plastic containers (10). More particularly, the invention relates to such an apparatus and method whereby optical energy absorbing compounds are added to the materials comprising the layer(s) of the container (10) to facilitate inspection thereof. Apparatus comprises a sensor unit (40), an illumination unit (30) for illuminating a portion of electromagnetic spectrum at a near IR wavelength to an inspection zone (20) which is located between the sensor unit (40) and the illumination unit (30). A processing unit (50) which receives an output of the sensor unit (40) and determines the attributes of the multi-layer plastic containers (10).

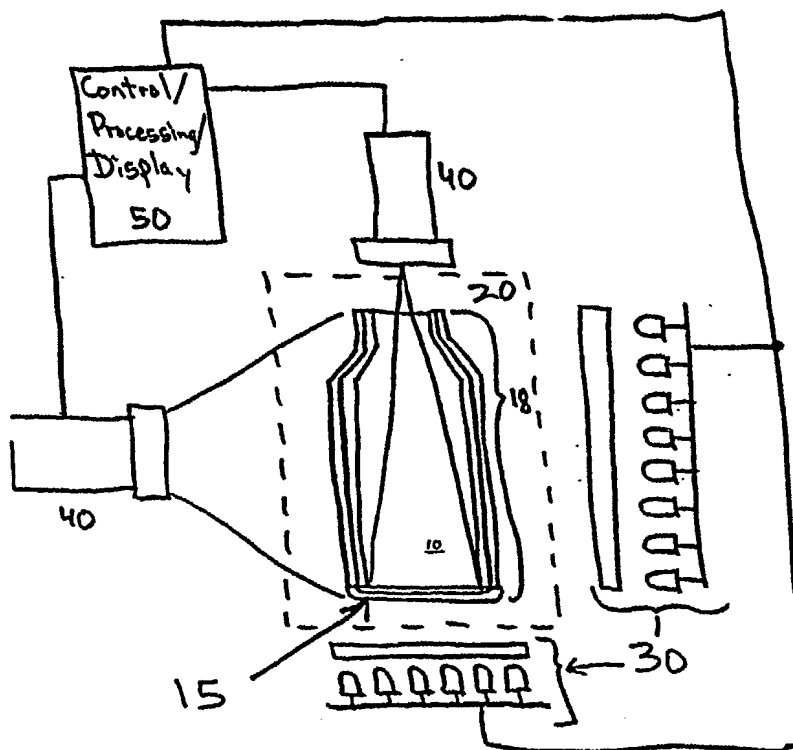

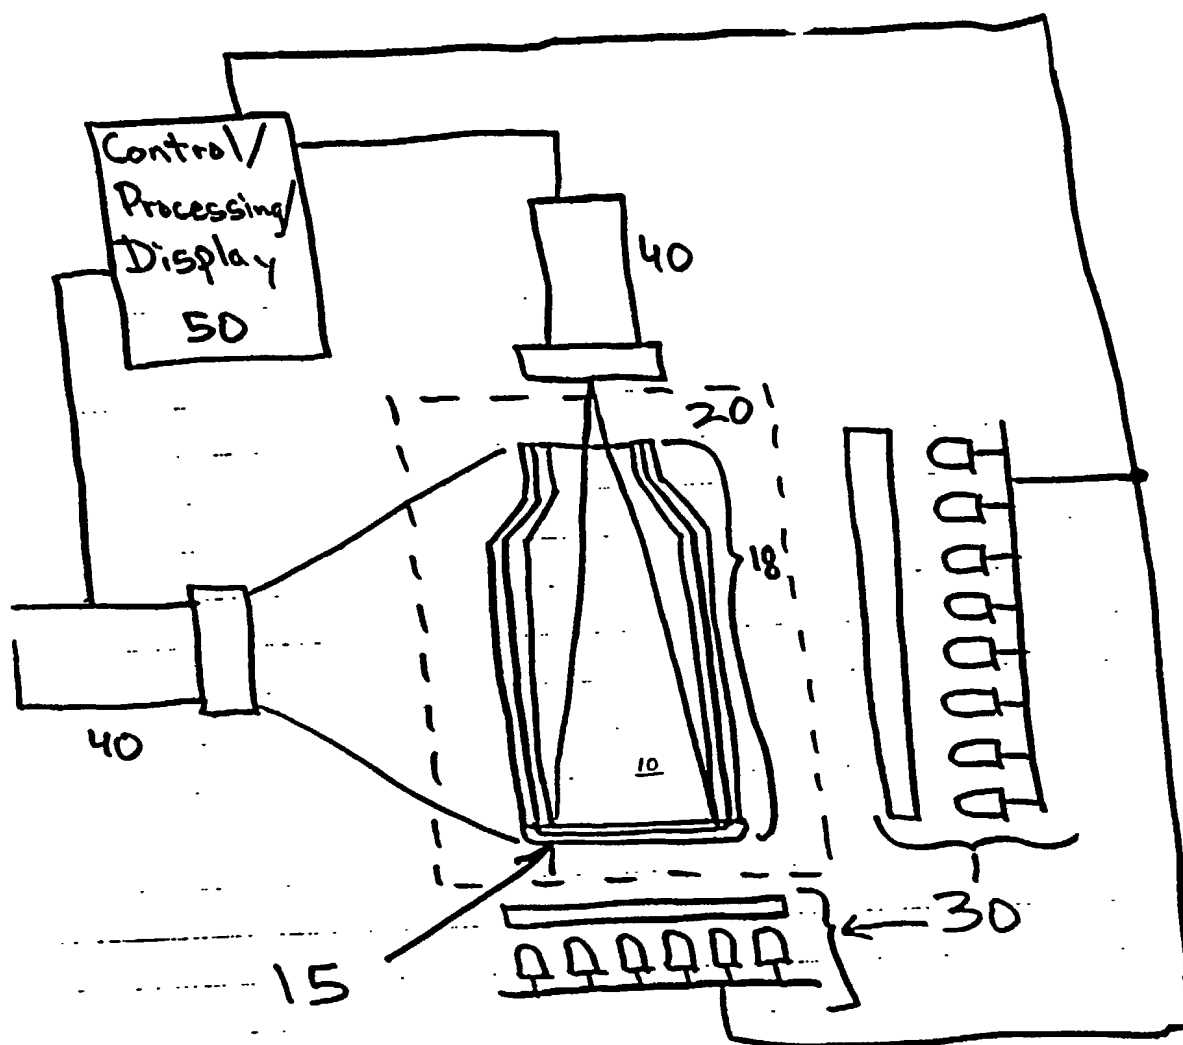


Figure 1

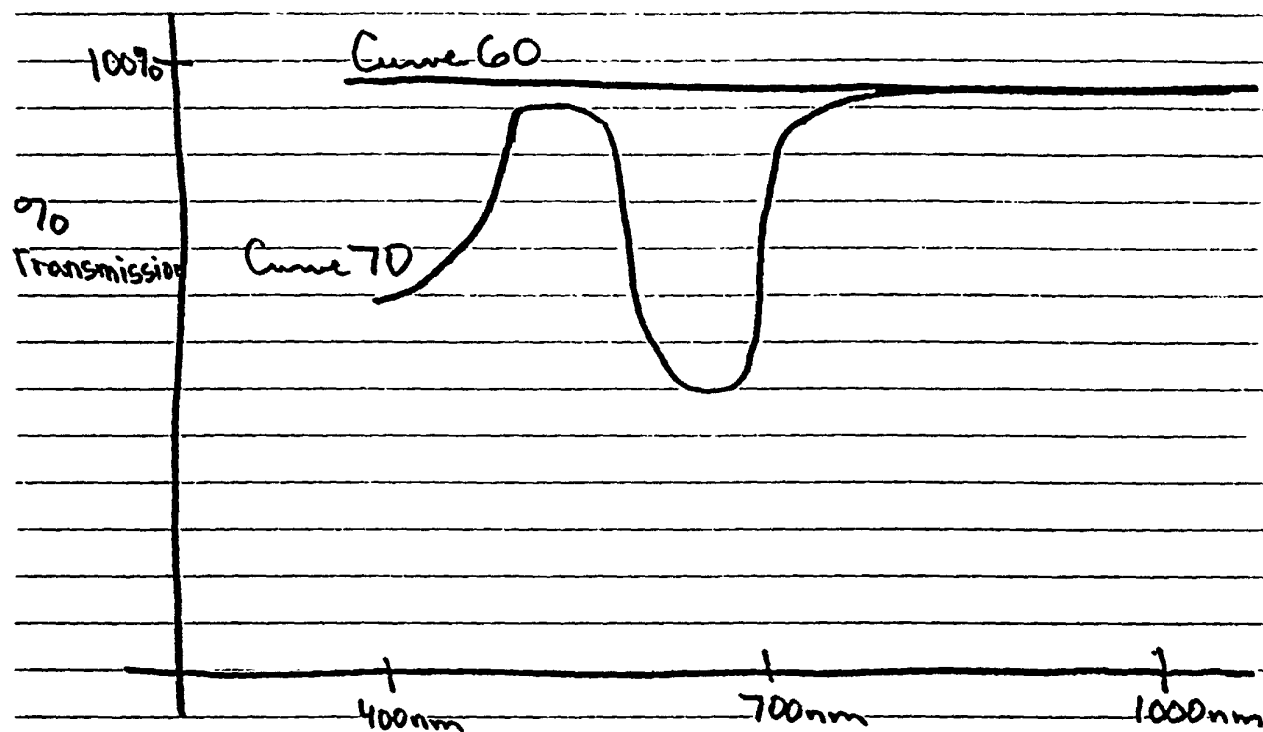
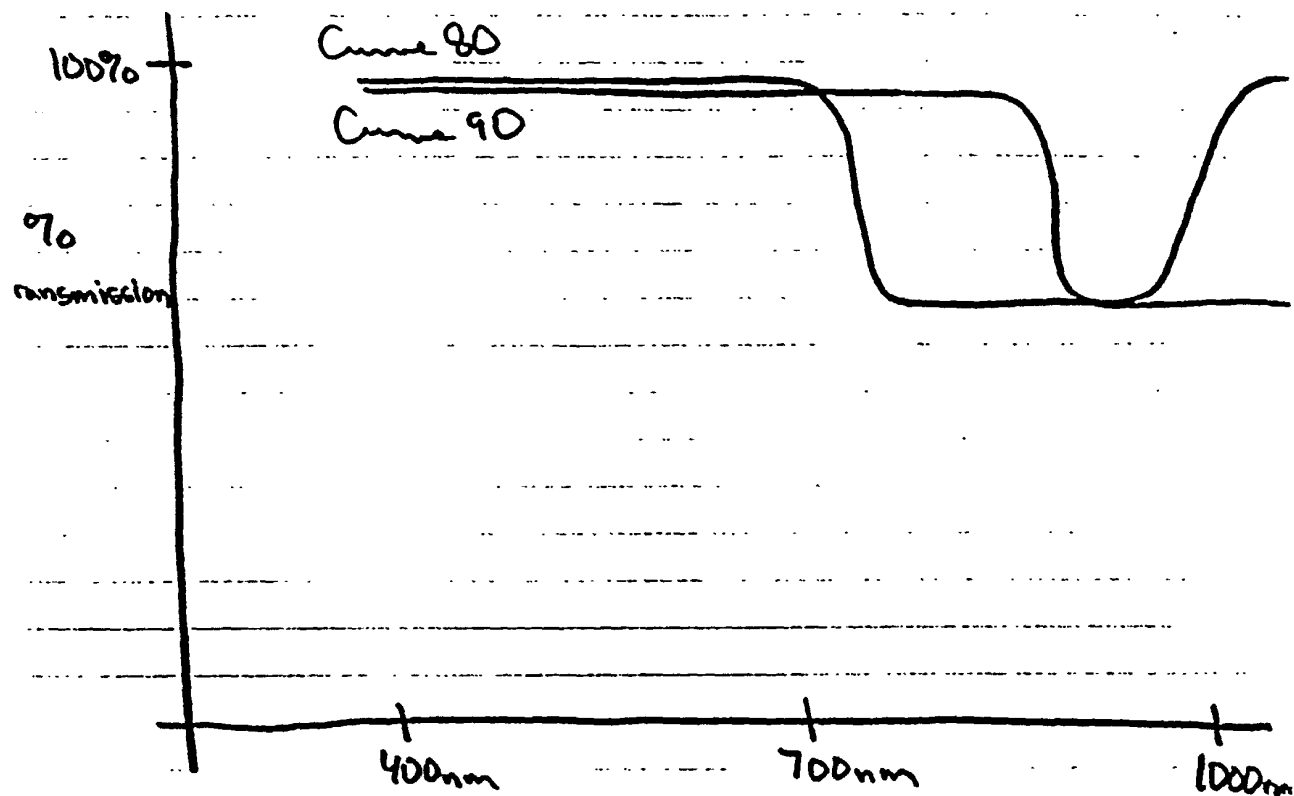


Figure 2



Figure 3

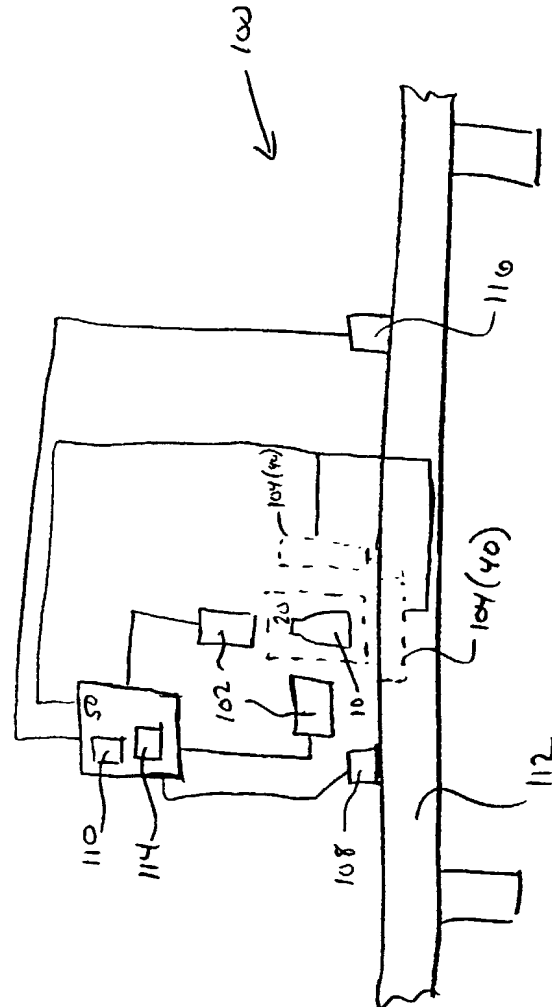


FIGURE 4

5/5

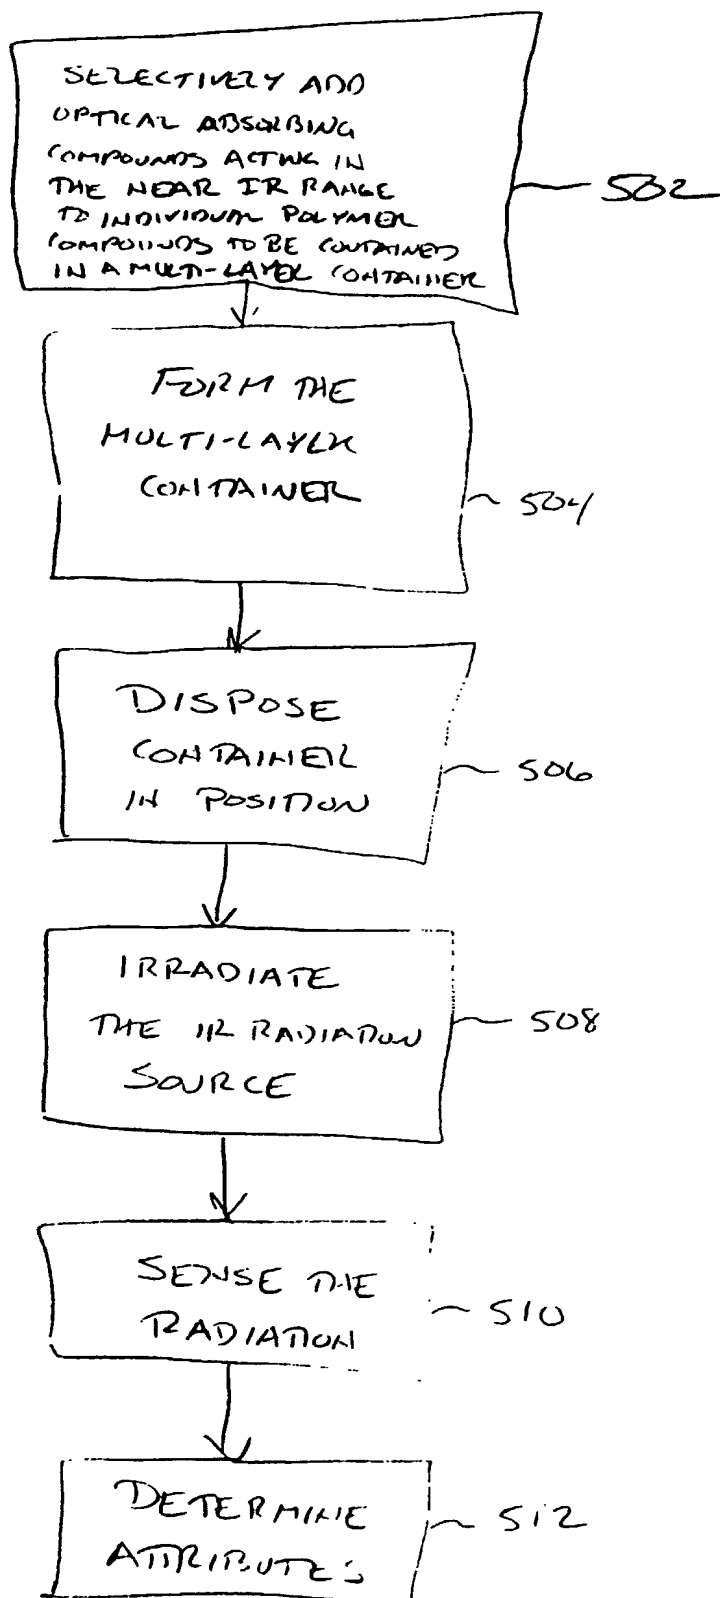


FIGURE 5

**DECLARATION AND POWER OF ATTORNEY**  
**FOR UTILITY PATENT APPLICATION**  
 (37 CFR 1.63)

As a below inventor, I hereby declare that:

My residence, mailing address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**METHOD AND APPARATUS FOR INSPECTING  
MULTI-LAYER PLASTIC CONTAINERS**

the specification of which was filed on October 23, 2001 as United States Application Number 10/018,267.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent or inventor's certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application(s) for patent or inventor's certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application Number(s)	Country	Foreign Filing Date	Priority Not Claimed	Certified Copy Attached? YES NO

I hereby claim the benefit under 35 U.S.C. 119(e) of the United States provisional application(s) listed below.

Application Number(s)	Day/Month/Year Filed	Additional Provisional Application Numbers Listed on Supplemental Priority Data Sheet Attached
60/130,894	23 April 1999	None

I hereby claim the benefit under Title 35, United States, § 120 of any United States application(s) or any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information which is material

to patentability as defined in Title 37, of Federal Regulations Code, § 1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Parent Application or PCT Parent Number	Parent Filing Date Day/Month/Year Filed	Parent Patent Number (if applicable)
PCT/US00/10778	21 April 2000	

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Mark E. Bandy, Reg. No. <u>35,788</u>	Sandra M. Koenig, Reg. No. 33,722
Brian G. Bembenick, Reg. No. <u>41,463</u>	Scott A. McCollister, Reg. No. 33,961
Alan C. Brandt, Reg. No. <u>P50,218</u>	James W. McKee, Reg. No. 26,482
John P. Cornely, Reg. No. <u>41,687</u>	Richard J. Minnich, Reg. No. 24,175
David B. Cupar, Reg. No. <u>47,510</u>	Jay F. Moldovanyi, Reg. No. 29,678
Joseph D. Dreher, Reg. No. <u>37,123</u>	Philip J. Moy, Reg. No. 31,280
Matthew P. Dugan, Reg. No. <u>44,663</u>	Timothy E. Nauman, Reg. No. 32,283
Christopher B. Fagan, Reg. No. <u>22,987</u>	Erik J. Overberger, Reg. No. 48,556
Patrick D. Floyd, Reg. No. <u>39,671</u>	Patrick R. Roche, Reg. No. 29,580
Jude A. Fry, Reg. No. <u>38,340</u>	James E. Scarbrough, Reg. No. 47,056
Steven M. Haas, Reg. No. <u>37,841</u>	Ann M. Skerry, Reg. No. 45,655
Michael E. Hudzinski, Reg. No. <u>34,185</u>	Mark S. Svat, Reg. No. 34,261
Edward T. Kennedy, Reg. No. <u>48,478</u>	Anuj K. Wadhwa, Reg. No. 50,407
Richard M. Klein, Reg. No. <u>33,000</u>	Joseph E. Waters, Reg. No. 50,427
Thomas E. Kocovsky, Reg. No. <u>28,383</u>	Jason A. Worgull, Reg. No. 48,044

**DIRECT ALL CORRESPONDENCE TO:**  
Richard J. Minnich, Esq.  
Fay, Sharpe, Fagan, Minnich & McKee, LLP  
1100 Superior Avenue, 7th Floor  
Cleveland, OH 44114-2518


**DIRECT TELEPHONE CALLS TO:**  
Richard J. Minnich, Esq.  
 Telephone: 216/861-5582  
 Facsimile: 216/241-1666

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under 18 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the APPLICATION or any patent issued thereon.

**Name of First Joint Inventor:**

DON W. COCHRAN

**Inventor's Signature:**



**Date:**

4-2-02

**Residence:**

13665 Braeburn Lane  
Novelty, OH 44072 OH  
 U.S.

**Country of Citizenship:**

U.S.

**Mailing Address:**

13665 Braeburn Lane  
 Novelty, OH 44072

2-00  
**Name of Second Joint Inventor:**

Inventor's Signature:

Date:

Residence:

Country of Citizenship:

Mailing Address:

Steven D. Cech



4-2-02

670 Rock Creek Drive  
Aurora, OH 44202 OH  
U.S.

U.S.

670 Rock Creek Drive  
Aurora, OH 44202